



BJK/R4K-0/SH51-03A Doubleclick Updater Manual

Note: This will not work for the BPK/R4K-XT/SH51-03B


ORIGINATOR:	Kevin Peters	DATE:	7/1/20
	BJK/R4K-0/SH51-03A Streamlined Updater Manual	DOCUMENT NO. DOC000	A
		SHEET 1 OF 3	



Inneos

Preparation for update:

1. Open link for “DoubleClick Updater” from support site to a Windows PC.
2. Link will bring you to a dropbox site. Navigate to the top right download icon, and click “Direct Download”

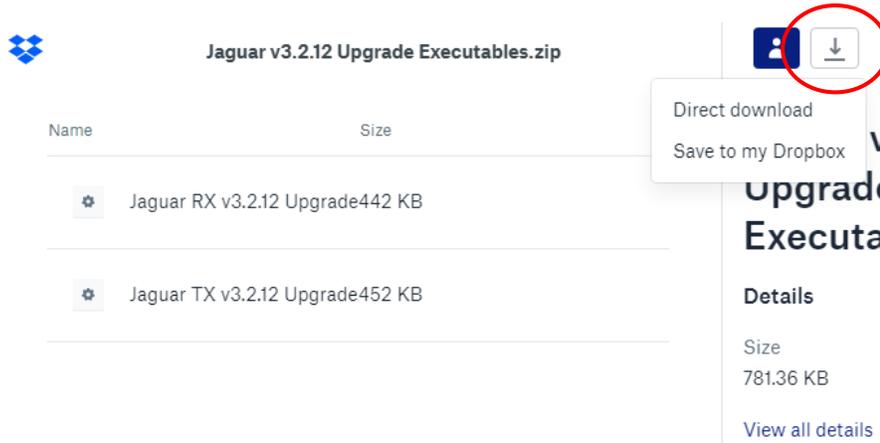


3. Upgrade files will most likely download as a zipped file.



4. Open the ZIP archive and extract file contents



5. Files should now show as unzipped and operable applications

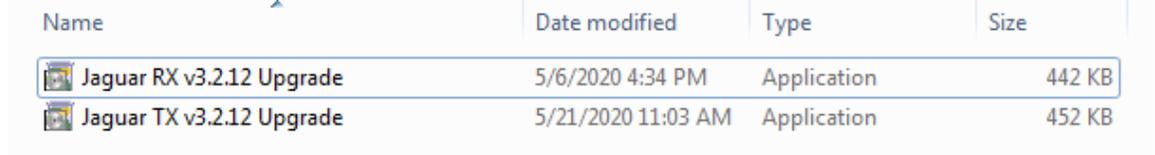

6. Connect module to computer (Note: Only 1 module may be connected at a time).
 - a. Make sure that the optical fiber is not connected to the attached module.
7. RX/TX Module should show solid Pink LED.

ORIGINATOR:	Kevin Peters	DATE:	7/1/20
	BJK/R4K-0/SH51-03A Streamlined Updater Manual	DOCUMENT NO. DOC000	A
		SHEET 2 OF 3	



Inneos

Procedure to Update Module Firmware

1. Open the Upgrade application corresponding to the TX or RX device connected to the computer
2. Accept EULA
3. Connect device as above, then press the Any Key
4. Program will execute
5. Note previous and new Firmware Version/User ID
 - a. Disregard the first number - 3.2.2 and 3.2.12 in this case
6. Confirm "User ID is:" returns expected result. In this case, 3.2.12

```

C:\Windows\system32\cmd.exe
Attach Jaguar RX Module to USB.
=====
Press any key to continue . . .
New File Name is: RxJaguarApplication_v3.2.12.hex
Total Programmable Regions Reported by Device: 3
Detected segment change in hex file. New Line Address is: 0x200000
Hex File Imported successfully.
Previous User ID was: 81.03.02.02
New User ID is: 81.03.02.12
Jaguar Lock Status: OPEN
Serial No.: NOT VALID.
Label No.: NOT VALID.
Module Mode: Normal.
No Special Features.
RX Module detected.
User ID is: 81.03.02.12
=====
Press any key to continue . . .

```

7. Press the Any Key to exit application
 8. Rinse and repeat for the other side
- If this update process doesn't go "smooth like butter", call tech support – 925.464.3062

ORIGINATOR:		Kevin Peters		DATE:		7/1/20	
	BJK/R4K-0/SH51-03A Streamlined Updater Manual			DOCUMENT NO.		A	
				DOC000		SHEET 3 OF 3	